

LOAD CHARTS

Charts for T35120SL

Chart for the machine T35120SL:

- with floating forks palletiser,
- with standard DUNLOP 400/80 x 24 153B T37 TL tyres
- and with inflation pressure of 4,25 bars.
- on tyres (with stabiliser raised)

• on stabiliser

Figure 7

Figure 8

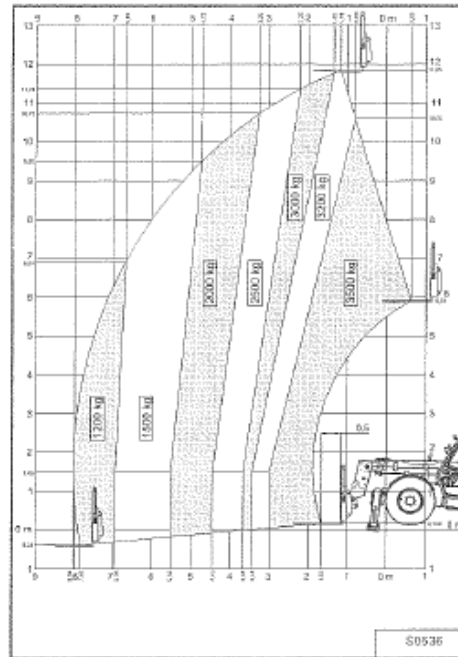
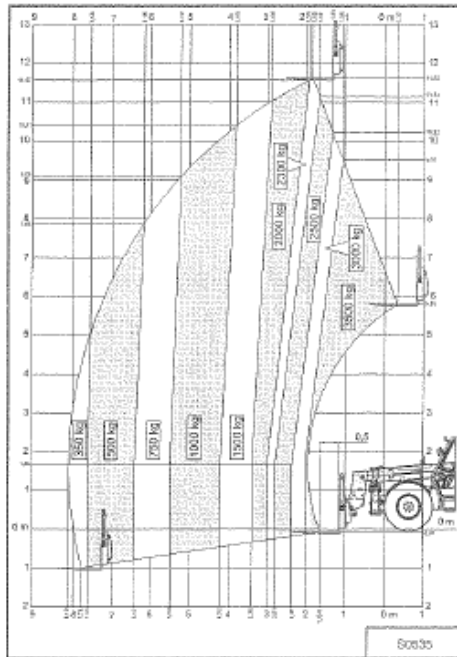


Chart for the machine T35120SL:

- with floating forks palletiser,
- with standard DUNLOP 405/70 x 20 MPT 152J 168A2 SP T9 tyres
- and with inflation pressure of 5,5 bars.
- on tyres (with stabiliser raised)
- on stabiliser

Figure 9

Figure 10

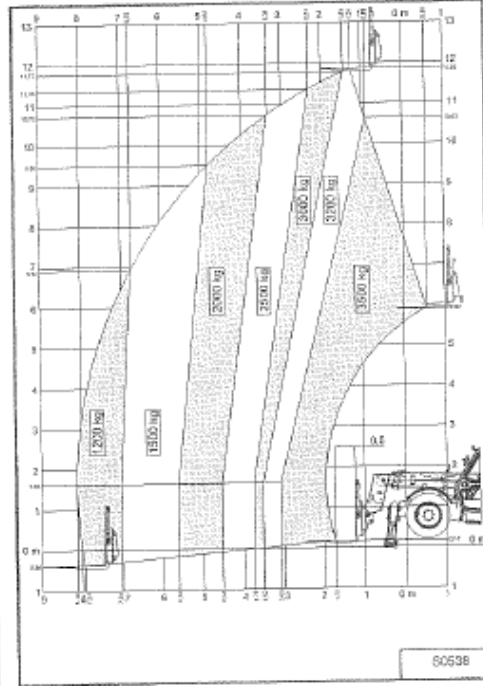
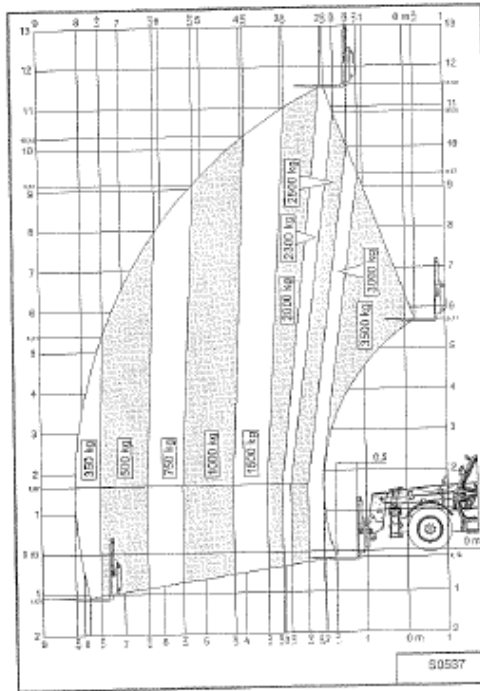


Chart for the machine T35120SL:

- with floating forks palletiser,
- with standard DUNLOP 405/70 x 20 MPT 152J 168A2 SP T9 tyres
- and with inflation pressure of 5,5 bars.
- on tyres (with stabiliser raised)
- on stabiliser

Figure 9

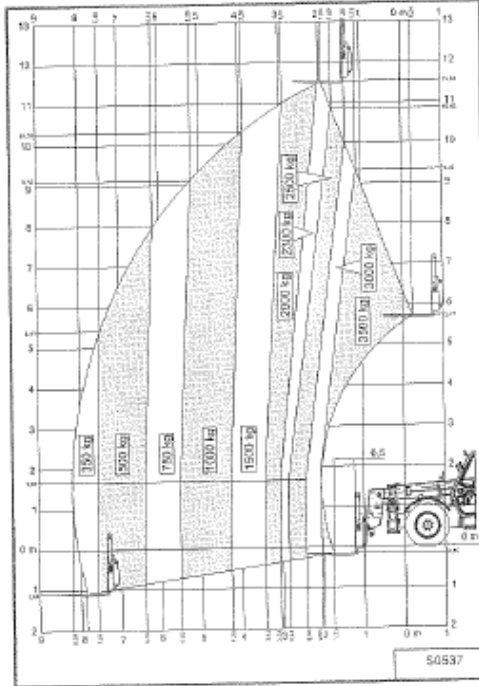


Figure 10

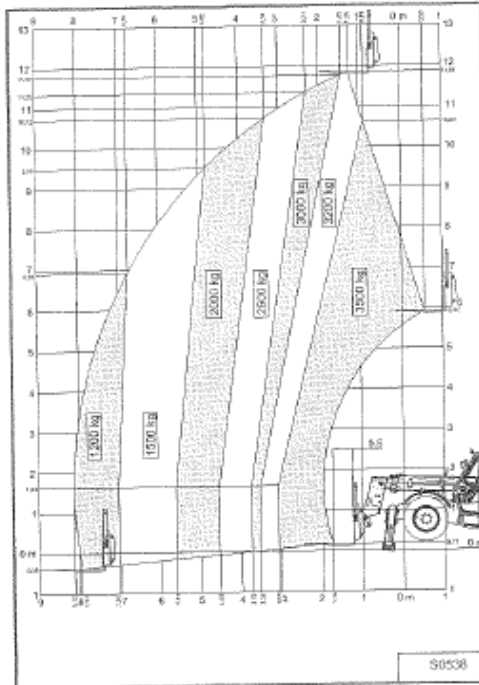


Chart for the machine T35120SL:

- with floating forks palletiser,
- with standard TITAN 400/70 x 20 150B 166A2 LIFT RIGGER II tyres
- and with inflation pressure of 4 bars.
- on tyres (with stabiliser raised)
- on stabiliser

Figure 13

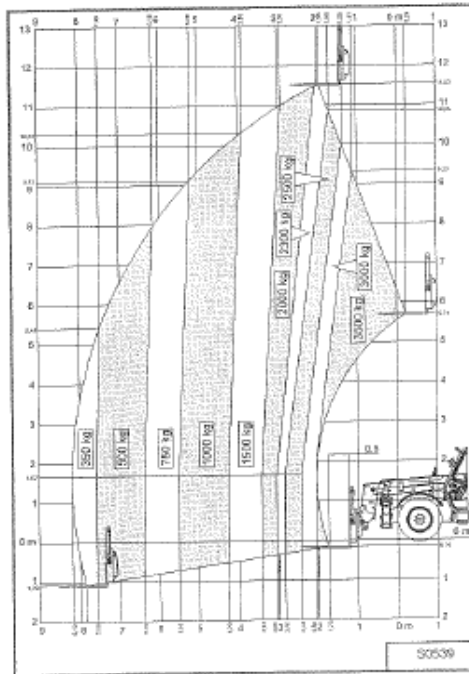


Figure 14

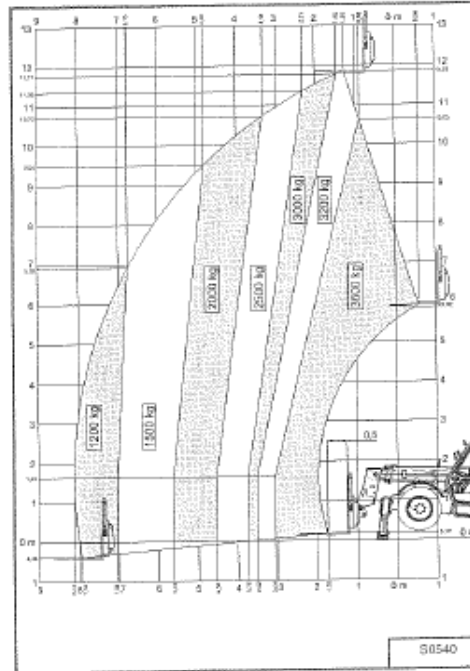




Chart for the machine T35120L:

- with floating forks palletiser,
- with standard
DUNLOP 400/70 x 20 150B T37 TL tyres
- and with inflation pressure of **4 bars**.

Figure 17

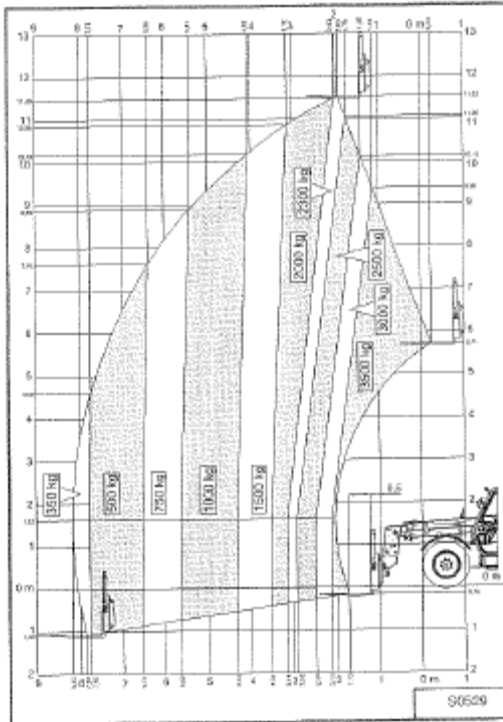


Chart for the machine T35120L:

- with floating forks palletiser,
- with standard
TITAN 400/70 x 20 150B 166A2 LIFT RIGGER II tyres
- and with inflation pressure of **4 bars**.

Figure 18

